
PRE RINSE UNIT



PULL OUT MIXER TAP

Overall Dimensions:
See below drawings
Tap Hole Size: 50 mm
Flow Rate: 4.5L/min
Shipping Dimensions:
1180 (w) x 300 (d) x 95 mm (h)
Shipping Weight: 7 kg
Material: Full stainless steel construction

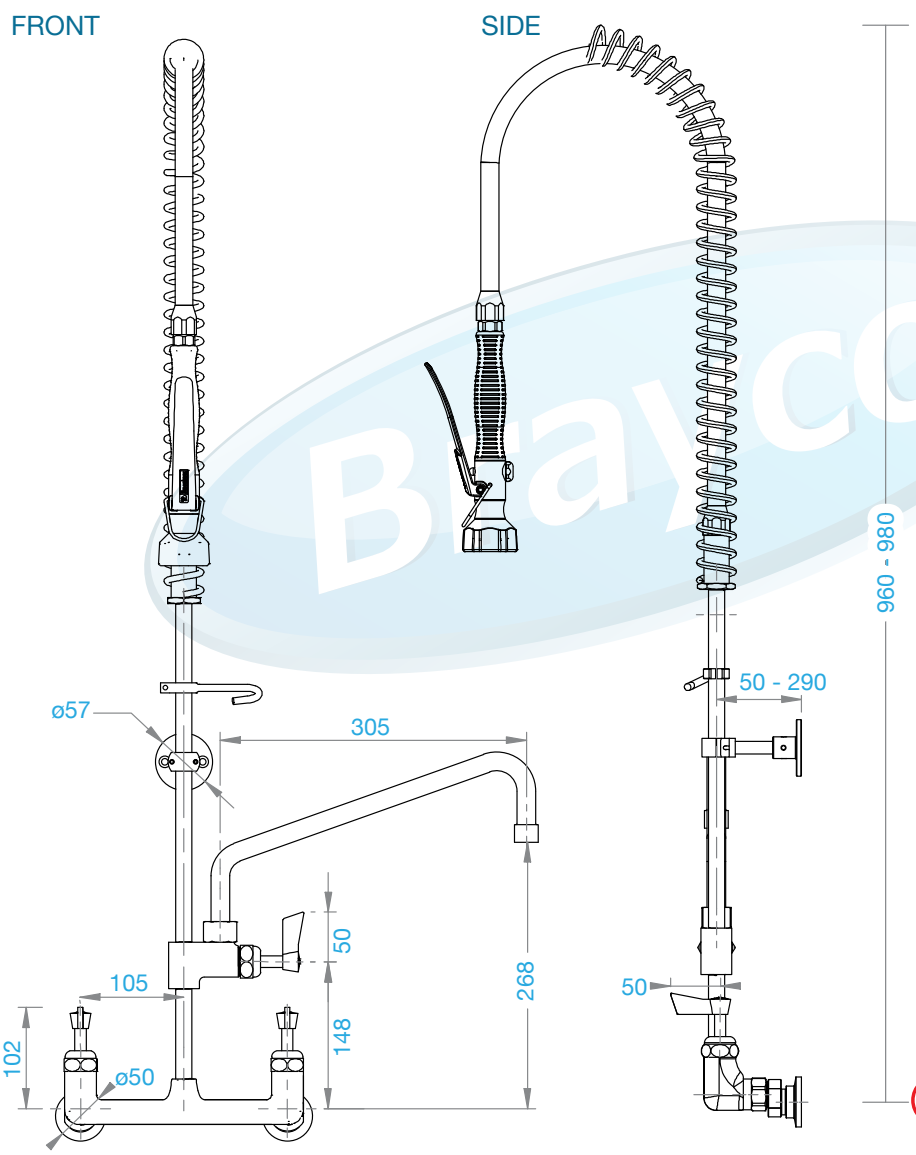

PRODUCT CODE:

VT-TSPRAYFL-WM: Jet and Spray Nozzle

FEATURES AND BENEFITS

- Red / Blue Indexing on Handle
- Swivel Tap
- Dual Hob Tap Body Includes Inlet Hoses
- 1/2 Turn Rising Spindles
- Self Closing Trigger Valve
- Stay Open Clip for Prolonged Use
- Watermark and WELS Approved
- Minimal Assembly Required
- Working Pressure Range: 150kPa - 500kPa
- Maximum Operating Temperature: 80 degrees

- Drain included: NO
- Spout Width: 231 mm
- Spout Height: 960 mm (Hooked) 980 mm (Unhooked)

INSTALLATION

- Tap Hole Size: 50mm

CODES / STANDARDS

- Watermark and WELS Approved
- Water Efficiency: 6 Star 4.5L/min Trigger Valve

Product has been registered according to the requirements of the WELS standard (AS/NZS 6400:2016 Water efficient products - Rating and labeling).

Whilst all care has been taken when compiling this information, designs & dimensions shown are indicative only and should not be relied upon without prior approval.
Brayco reserves the right to make changes without notice.